


# MANUAL

## KONTROLLBOX ART.NR 401020

### TRÅDLÖS FJÄRRKONTROLL | 4 KANALER MED DT-KONTAKTER | 60A SÄKRING

- Spänning: 12-30V DC
- 4 kanaler med DT2-kontakter
- Kanal 1: Max 20A
- Kanal 2: Max 15A
- Kanal 3: Max 10A
- Kanal 4: Max 10A
- Säkring: 60A
- IP-klassning kontrollbox: IP65
- Arbetstemperatur: -17°C - + 107°C
- Trådlös uppladdningsbar fjärrkontroll
- USB-kabel ingår

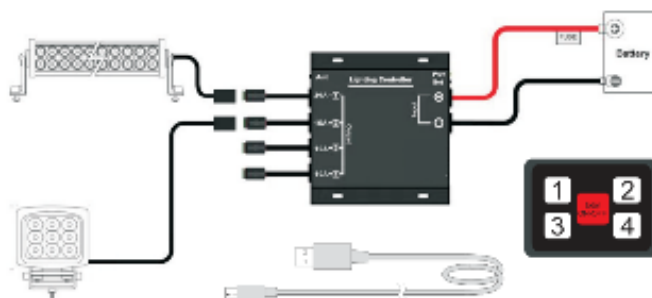


#### PROGRAMMERA FJÄRRKONTROLL

1. Anslut svart kabel på kontrollboxen till jord (-).
  2. Klicka på den röda ON/OFF-knappen på kontrollen. Knapparna lyser nu grönt.
  3. Håll inne den röda ON/OFF-knappen på kontrollen, samtidigt som du ansluter röd kabel på kontrollboxen till +.
- Klar!

### WIRELESS CONTROLLER | 4 CHANNELS WITH DT CONNECTORS | 60A FUSE

- Voltage: 12-30V DC
- 4 channels with DT2 connectors
- Channel 1: Max 20A
- Channel 2: Max 15A
- Channel 3: Max 10A
- Channel 4: Max 10A
- Fuse: 60A
- IP-class control box: IP65
- Working temperature: -17°C - + 107°C
- Wireless rechargeable controller
- USB cable included

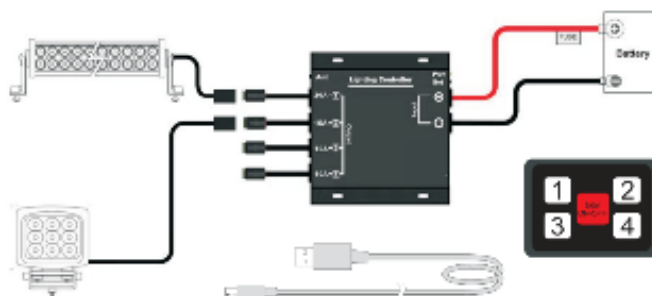

#### PROGRAM WIRELESS REMOTE CONTROLLER

1. Connect black cable on control box to ground (-).
  2. Click the red ON/OFF button on the controller. The buttons now glow green.
  3. Hold down the red ON/OFF button on the controller, while connecting the red cable on the control box to +.
- Done!

Scanna för produktinformation  
Scan for product information



@cad\_ledlight



@CAD lights up your way

